


## Connectors with shared bandwidth



Configuration		1	2
A	PCIEX16_2	x4	x1
	PCIEX1_1	-	x1
	PCIEX1_2	-	x1
	PCIEX1_3	-	x1
Configuration		1	2
B	M.2_2	PCIe 3.0 x4 / SATA	-
	SATA6G_56	-	v

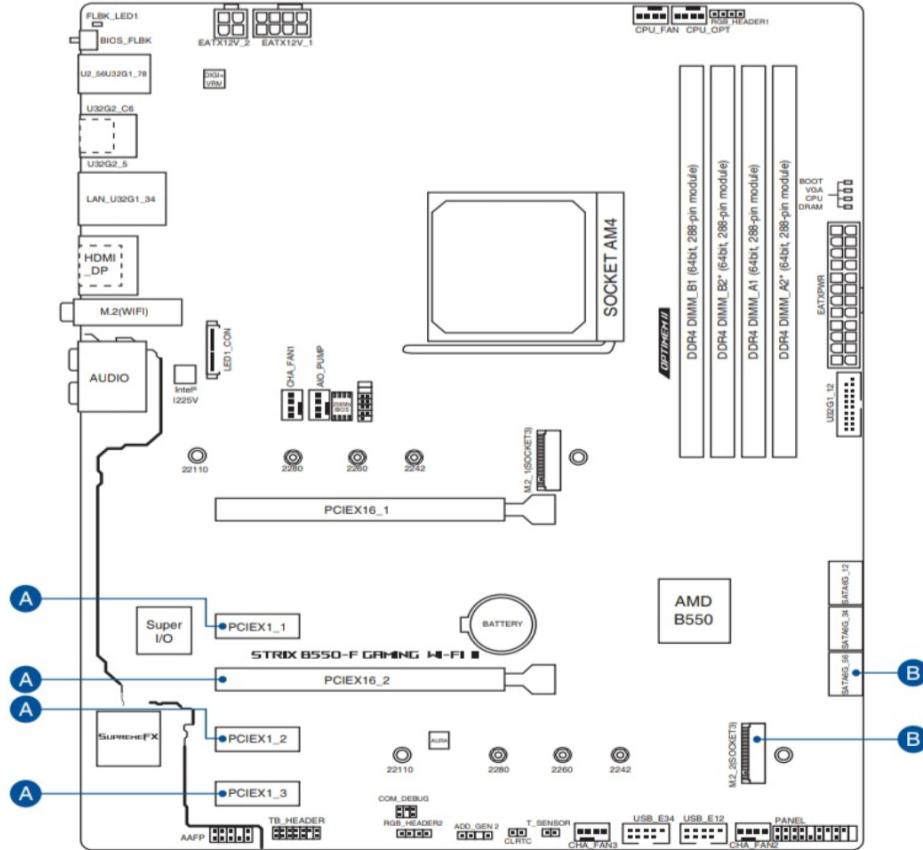

- PCIe16\_2 shares bandwidth with PCIe1\_1, PCIe1\_2, and PCIe1\_3. When PCIe16\_2 runs x4 mode, PCIe1\_1, PCIe1\_2, and PCIe1\_3 will be disabled. PCIe16\_2 will run x1 mode when PCIe1\_1, PCIe1\_2, or PCIe1\_3 is occupied.
- When M.2\_2 slot is populated, SATA6G\_56 will be disabled.

